

# 8-Channel Lens Signal Switcher (with terminal block)

## 【Specifications】


Input: Control BOX "CB-3" DIN4 pin × 1  
 Allowable Current: 0.5A  
 Applicable lens: 6 (4) Wire method (loose cable end)  
 Number of lenses that can be connected: Up to 8 lenses

Lens connection: M3 threaded terminal block, jack-to-terminal  
 pitch 7.62mm  
 Switching method : Interlocking type (1channel selection)  
 Operating temperature range: -10~+50°C  
 Dimensions: 200 × 140 × 100mm

## 【Configuration】

Signal switcher.....1 CB-3 connection cable (DIN4 male-male)

## 【Exterior appearance】

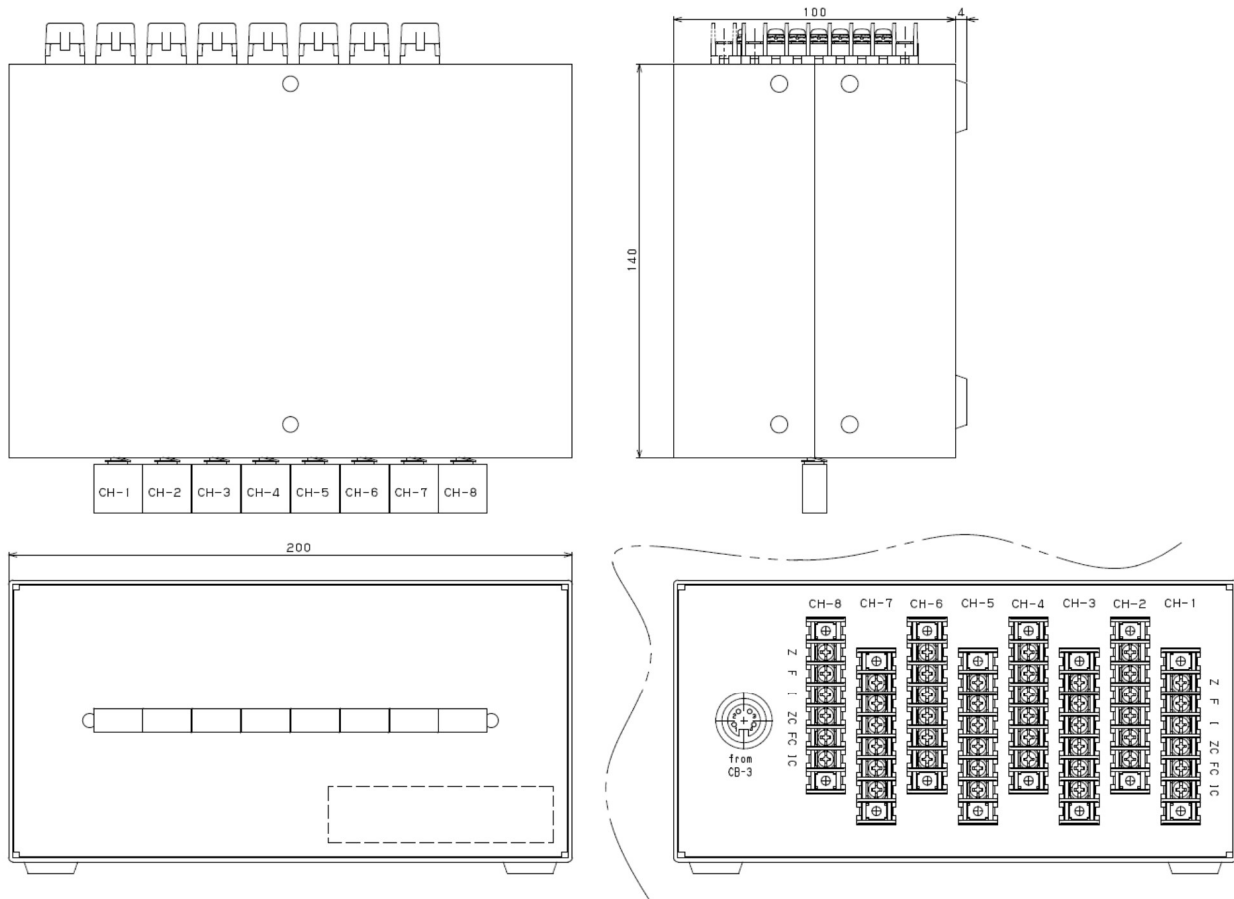

- ※1. When switch button is pushed down and becomes "ON", color of frontal button changes from black to red.
- ※2. Due to the nature of the switch, there are rare cases where 2 channels are turned on at the same time.  
 In this case, please press the button again so that it becomes every 1channel. Simultaneous operation of 2 units or more lenses will cause the operating power of this unit and the CB-3 to deviate from the allowable range of use.

Specifications, appearance, etc. are subject to change without notice.

【Circuit Diagram】

